




IP20

RAPIDE T8

A luminaire similar to the Optilux, but has the benefit of pre-lamping, Wieland 4 way panel mounted socket/terminal block on a rear access panel and low tack protective film to peel off once installed.

SPECIFICATION

- Includes T8 tubes
Colour 840 Triphosphor with HF versions
- HF gear as standard
- Includes low tack protective film, that is easily peeled off after installation
- Controllers include CIBSE LG3(2001) C2 65° louvres designed to comply with the latest requirements, standard low brightness and framed prismatic in TP(a) only
- Unlike louvred versions, the prismatic panel variant requires the diffuser to be removed prior to installation and refitted

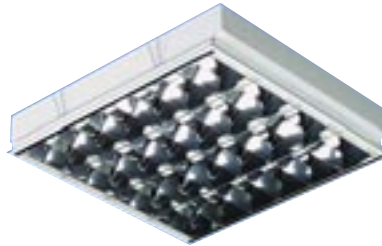

RAPIDE WITH CAT2 LOUVRE

Part No.	Description	Code
600x600		
FMRAP663HFC2	3X18W High Frequency	4752
FMRAP663HFE3C2	3X18W HF Emergency	4753
FMRAP664HFC2	4X18W High Frequency	4752
FMRAP664HFE3C2	4X18W HF Emergency	4753
1200x600		
FMRAP1263HFC2	3X36W High Frequency	4762
FMRAP1263HFE3C2	3X36W HF Emergency	4763
FMRAP1264HFC2	4X36W High Frequency	4762
FMRAP1264HFE3C2	4X36W HF Emergency	4763

RAPIDE WITH STANDARD LOW BRIGHTNESS LOUVRE

Part No.	Description	Code
600x600		
FMRAP663HFSL	3X18W High Frequency	6752
FMRAP663HFE3SL	3X18W HF Emergency	6753
FMRAP664HFSL	4X18W High Frequency	6752
FMRAP664HFE3SL	4X18W HF Emergency	6753
1200x600		
FMRAP1263HFSL	3X36W High Frequency	6762
FMRAP1263HFE3SL	3X36W HF Emergency	6763
FMRAP1264HFSL	4X36W High Frequency	6762
FMRAP1264HFE3SL	4X36W HF Emergency	6763

RAPIDE WITH TP(A) DIFFUSER


Part No.	Description	Code
600x600		
FMRAP663HFTPA	3X18W High Frequency	7752
FMRAP663HFE3TPA	3X18W HF Emergency	7753
FMRAP664HFTPA	4X18W High Frequency	7752
FMRAP664HFE3TPA	4X18W HF Emergency	7753
1200X600		
FMRAP1263HFTPA	3X36W High Frequency	7762
FMRAP1263HFE3TPA	3X36W HF Emergency	7763
FMRAP1264HFTPA	4X36W High Frequency	7762
FMRAP1264HFE3TPA	4X36W HF Emergency	7763

RAPIDE FIT INTERCONNECTIONS

Part No.	Description	Code
Wieland 4 Pole GST with LSOH 4 Core Cable		
G1.044.0302.1	Male/Female + 3m Lead	4135
G1.044.0402.1	Male/Female + 4m Lead	4135
G1.044.0502.1	Male/Female + 5m Lead	4135
G1.344.0502.1	Female + 3m Bare Lead	4035
Wieland 4 Pole GST Solid Tee Piece Connector		
G920.40.1053.1	Male/Female/Female	4136

LAMP GUIDE

See pages 143-145 for a comprehensive lamp guide

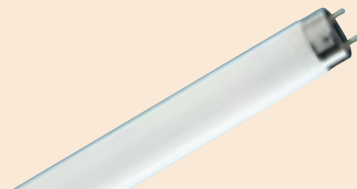

M = Male Plug

F = Female Connector

- Easy rear access to a terminal block and Wieland 4 way panel mount female socket fitted as standard
- A range of interconnections ensure any project undertaken using this luminaire truly is 'Rapide'

