

## SEALED LUMINAIRES

### IMPERVIA T5 & TCL

Two robust, pull-up sealed luminaires for use in clean area environments. IP65 version jet proof from below and IP54 from above ceiling. IP54 version splashproof from below the ceiling only.



**IP65/54**




#### IMPERVIA IP65

Part No.	Description	Code
<b>600x600</b>		
IMPR662TCL34TPA	2x34W TCL	5216
IMPR662TCL40TPA	2x40W TCL	5216
IMPR66414TPA	4x14W T5 HE	5216
IMPR66424TPA	4x24W T5 HO	5216
<b>1200x600</b>		
IMPR126428TPA	4x28W T5 HE	5212
IMPR126454TPA	4x54W T5 HO	5212
<b>1200x300</b>		
IMPR123228 TPA	2x28W T5 HE	5213
IMPR123254 TPA	2x54W T5 HO	5213





IP65 Fixing Details

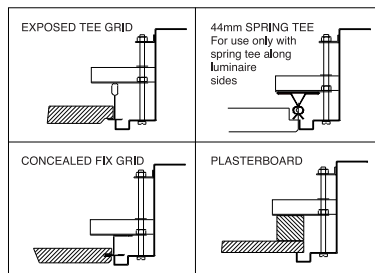

#### SPECIFICATION

- TCL requires lamps
- T5 supplied with colour 840 tubes
- Pull-up into ceiling via bespoke Side Arm Supports to ensure IP54 rating above and IP65 below ceiling
- TP(a) prismatic diffuser and gasket secured in steel frame via M5 x 20 Pan Posi screws (2 per 600mm)

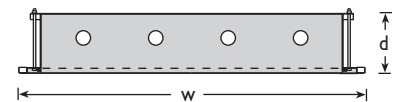

#### IMPERVIA IP54


Part No.	Description	Code
<b>600x600</b>		
IMPV662TCL34TPA	2x34W TCL	5216
IMPV662TCL40TPA	2x40W TCL	5216
IMPV66414TPA	4x14W T5 HE	5216
IMPV66424TPA	4x24W T5 HO	5216
<b>1200x600</b>		
IMPV126428TPA	4x28W T5 HE	5212
IMPV126454TPA	4x54W T5 HO	5212
<b>1200x300</b>		
IMPV123228 TPA	2x28W T5 HE	5213
IMPV123254 TPA	2x54W T5 HO	5213

- Suffix
- E3 = 3 Hour Maintained Emergency Pack (Integral)
  - HFR = Dimmable (Analogue 1-10V)
  - SD = Switch Dim
  - DSI = Digital Dimming



#### SPECIFICATION

- TCL requires lamps
- T5 supplied with colour 840 tubes
- Pull-up into ceiling via Lumafix Side Arm Supports
- TP(a) prismatic diffuser and gasket secured in steel frame via M5 x 20 Pan Posi screws (2 per 600mm)

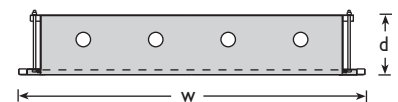

#### DIMENSION TABLE (mm):

	L	W	D
600x600	599	599	119
1200x300	1199	299	119
1200x600	1199	599	119

- Nominal Cut-out Sizes for Solid Ceiling
  - 300mm = 277mm
  - 600mm = 577mm
  - 1200mm = 1177mm
- 150mm minimum ceiling void required

#### IDEAL FOR

- Hospitals
- Kitchens
- Car Ports
- Under Canopy

■ Surface IP65 battens see page 96