

GENERAL PUPOSE FLOODLIGHTS



DIE CAST SECTOR FLOOD

A range of general purpose floodlights with a compact and unobtrusive die cast aluminium construction and toughened glass cover providing good photometric performance.



IP65

SECTOR


DIE CAST DISCHARGE FLOOD

Part No.	Description	Code
SODIUM		
SFL150SON	150W Son-T GES	4337
SFL250SON	250W Son-T GES	4343
SFL400SON	400W Son-T GES	4349
HALIDE		
SFL250MH	250W M/Halide GES	4345
SFL400MH	400W M/Halide GES	4351
WITH PHOTOCCELL		
SODIUM		
SFL150SON/PC	150W Son-T GES	4338
SFL250SON/PC	250W Son-T GES	4344
SFL400SON/PC	400W Son-T GES	4350
HALIDE		
SFL250MH/PC	250W M/Halide GES	4346
SFL400MH/PC	400W M/Halide GES	4352



SPECIFICATION

- Includes lamps
- Die cast aluminium construction with toughened glass cover
- IP66 Rating, certified to EN60598
- Good photometric performance
- Available with pre-installed photocells factory fitted
- Windage 0-13

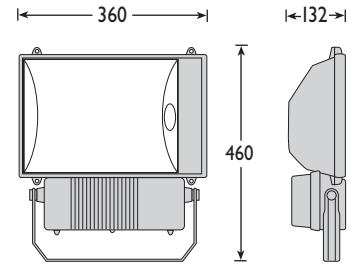

SECTOR

DIE CAST ASYMMETRIC MINI FLOOD

Part No.	Description	Code
DISCHARGE		
SFL70AMH	70W M/Halide TD	4355
SFL150AMH	150W M/Halide TD	4399



SPECIFICATION

- IP65 Halide Miniflood
- High quality silver powder coated cast aluminium construction
- Double ended metal halide lamps included for crisp white light
- Compact fitting with attractive slim profile and asymmetrical reflector
- Die cast aluminium construction with toughened glass cover

