

## T5 BATTENS

### T5 LINKABLE BATTEN

A comprehensive range of slimline High Frequency T5 Fluorescent Battens and Accessories using the latest in lamp technology to produce a batten more efficient and more powerful than the conventional T8 version. Ideal for commercial applications from undershelf lighting to high ceilings.



**IP20**



#### HIGH EFFICIENCY T5 HE BATTENS

Part No.	Description	Length	Code
<b>Single</b>			
T5B2114H	1X14W T5 HE	2ft (600mm)	5812
T5B3121H	1X21W T5 HE	3ft (900mm)	5813
T5B4128H	1X28W T5 HE	4ft (1200mm)	5814
T5B5135H	1X35W T5 HE	5ft (1500mm)	5815
<b>Twin</b>			
T5B2214H	2X14W T5 HE	2ft (600mm)	5822
T5B3221H	2X21W T5 HE	3ft (900mm)	5823
T5B4228H	2X28W T5 HE	4ft (1200mm)	5824
T5B5235H	2X35W T5 HE	5ft (1500mm)	5825

Polycarbonate diffusers can be used with all HE and single HO Battens

#### HIGH OUTPUT T5 HO BATTENS

Part No.	Description	Length	Code
<b>Single</b>			
T5B2124Q	1X24W T5 HO	2ft (600mm)	5812
T5B3139Q	1X39W T5 HO	3ft (900mm)	5813
T5B4154Q	1X54W T5 HO	4ft (1200mm)	5814
T5B5149Q	1X49W T5 HO	5ft (1500mm)	5815
T5B5180Q	1X80W T5 HO	5ft (1500mm)	5815
<b>Twin</b>			
T5B2224Q	2X24W T5 HO	2ft (600mm)	5822
T5B3239Q	2X39W T5 HO	3ft (900mm)	5823
T5B4254Q	2X54W T5 HO	4ft (1200mm)	5824
T5B5249Q	2X49W T5 HO	5ft (1500mm)	5825
T5B5280Q	2X80W T5 HO	5ft (1500mm)	5825

Polycarbonate diffusers cannot be used with twin and 80w HO Battens

Suffix:

E3 = 3 Hour Maintained Emergency Pack (Integral)

HFR = Dimmable (Analogue 1-10V)

SD = Switch Dim

DSI = Digital Dimming

Linkable Options:

TW = Through Wired connectors each end of Batten

ER = End of Run wired with a single connector

#### T5 BATTEN LINKABLE ACCESSORIES

Part No.	Description
<b>PowerLead</b>	
T5BP4/5M	4 Pole 5M HF&E3 Starter Lead
T5BP5/5M	5 Pole 5M HFR&DSI Starter Lead
<b>LinkLead</b>	
T5BL4/	4 Pole HF&E3 Interconnector
T5BL5/	5 Pole HFR&DSI Interconnector

Suffix: /1M to /5M = Lead length in metres




#### SPECIFICATION

- Fittings come complete with T5 colour 84 fluorescent lamp(s) High Efficiency or High Output lamp(s)
- Slimline body for unobtrusive use or where a limited space is available
- High Frequency control gear as standard
- Choice of reflector accessories available for optimum light distribution

#### Benefits of using T5 Fluorescent Tubes with HF Gear Include:

- Energy Saving
- High levels of light output
- Improved colour rendition
- Low lumen depreciation
- Long life
- Reduced maintenance costs

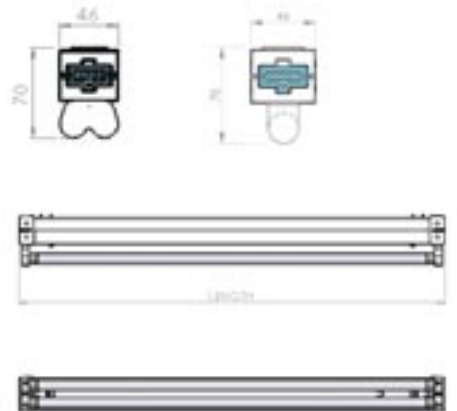

#### DIMENSION TABLE (mm):

	Length	Fixings
2ft	576	440
3ft	876	740
4ft	1176	1040
5ft	1476	1340



#### IDEAL FOR

- Universities, Schools, Colleges
- Utility Workshops
- Libraries
- Retail
- Factories & Warehouses
- Shops
- Pelmet Lighting

■ IP65 battens see page 96