



HORIZONTAL CFL DOWNLIGHT



IP20-65


The Horizontal CFL low energy downlight comes in three control gear options, economy switch start, superior performance high frequency and high frequency regulated dimming which will require an HFR dimmer. To achieve IP65 rating factory fitted bezels with fittings are required.

SPECIFICATION

- BSI kite marked
- Spun aluminium reflector
- HF integral gear as standard
- Emergency versions use 4 pin lamps and have remote gear
- Lightweight and easy fix
- Loop in loop out terminals
- Tri-wing fixings enables mounting in ceiling thicknesses from 1-30mm



IP65 version

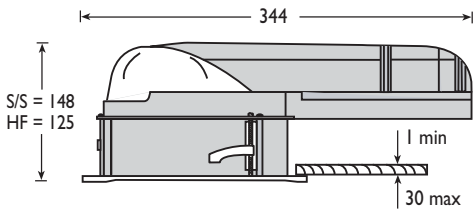

SWITCH START

Part No.	Description	Code
HPL118SS	18W TCD 2 pin	8312
HPL126SS	26W TCD 2 pin	8313
HPL218SS	2x18W TCD 2 pin	8322
HPL226SS	2x26W TCD 2 pin	8323

Requires lamps

Complete with white plastic bezel as standard

Suffix:

E3 = Emergency Version (Twin lamp emergency require 1x2 pin and 1x4 pin Lamp)

IP65 = IP65 Factory fitted Bezel

HIGH FREQUENCY

Part No.	Description	Code
HPL5601-D	18W TCDE 4 pin	8332
HPL5602-T	26W TCDE 4 pin	8333
HPL5603-T	32W TCDE 4 pin	8334
HPL5606-T	42W TCDE 4 pin	8335
HPL5605-D	2x18W TCDE 4 pin	8342
HPL5607-T	2x18W TCDE 4 pin	8342
HPL5608-T	2x26W TCDE 4 pin	8343

Requires lamps

Complete with white plastic bezel as standard

Suffix:

E3 = Emergency Version

IP65 = IP65 Factory fitted bezel

- HFR 1-10V dimmable versions available

SPECIFICATION

- Standard accessories also fit vertical standard downlights on page 33
- Twist & Lock action to fitting for ease of lamp change
- Fittings supplied with a white plastic bezel



STANDARD ACCESSORIES

Part No.	Description	Code
PLB5710	IP20 Bezel	8296
PLB5711	IP44 Bezel	8296
PLB5714	Floating Glass Bezel	8296
PLB5715	Floating Glass C/Hole	8296

Suffix: WHI = White, BRS = Brass,

CHR = Chrome, ALM = Aluminium

STANDARD ACCESSORY REFLECTORS

Part No.	Description	Code
PLB2CAT2	Push in Cat2 louvre	8296
PLB1KICK	Push in Kick reflector	8296

- These attachments push into existing reflector

LAMP GUIDE

See pages 143-145 for a comprehensive lamp guide



- 1-10V HFR dimming controls see page 136-139

