

Starlux range

IP65 Wall mounted bulkhead




Housing & refractor/cover in UV resistant polycarbonate. SON, compact fluorescent & Metal Halide versions up to 80W

- Complete with lamp
- Dust & water jet proof to IP65
- Electrical protection class I
- Cable entries in sides, top & back
- Suitable for mounting on normally flammable surfaces
- Optional photocell for automatic dusk to dawn switching



Lamp	Codes	with p'cell	wt kg
70W SON-E (I*)	S7070i	S7070i/PC	3.0
70W MBI-E	S7070H	S7070H/PC	5.0
80WMBF	S7080M	N/A	3.0
42W TC-TE	S7042	S7042/PC	2.1

(I*) = uses lamp with internal ignitor

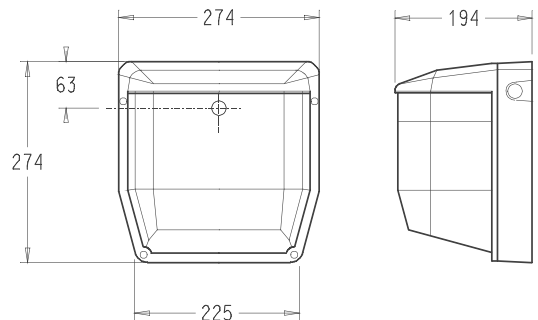

:	Sector
Dimensions (mm):	H274 X W274 X D194
Weight (KG):	see above
Cable entry:	Top, sides & back
Lamp Wattage (W):	as above
Lamp length/Type:	HID & comp. flu.
IP Rating:	IP65
No of Lamps:	1
Circuit electromagnetic	for HID electronic
Circuit electronic	for comp. flu
Total Circuit Watts (W):	70W = 83W, 80W = 92W

