

Consumer Units



Sector Consumer Units & Accessories	220 - 224
Crabtree Consumer Units & Accessories	225 - 226
Hager Consumer Units & Accessories	227 - 228
MK Consumer Units & Accessories	229 - 230
Wylex Consumer Units & Accessories	231 - 233
Square D Consumer Units	234

ALL NEW RANGE

Sector Insulated Consumer Units

Features:

- Manufactured to BSEN60439-3
- IP2X rating
- Pre-assembled ready to accept MCBs. (Fixed units only).
- Rated voltage 240V AC 50/60Hz.
- 100A. Busbar
- Complete with Earth and Neutral bars.
- Raised DIN rail providing top and bottom wiring routes.
- All round cable entry- top, bottom, sides and rear.
- Labels for circuit identification.
- Modular devices can be fitted
- Translucent visor for discreet appearance.



Insulated Fixed & Flexible Consumer Units Split Load with 100A DP Main Incomer

No of Ways Unprotected by RCD	No of Ways protected by RCD	Dimensions mm			Ref No.	Order No. 0001	Price	
		H	D	W			Each	3+

Fixed Units

3	3	225	248	111	SVCU33/INS	147580	38.75	36.75
5	4	225	302	111	SVCU54/INS	147603	44.95	42.95
6	6	225	355	111	SVCU66/INS	147616	48.75	45.95
9	8	225	445	111	SVCU98/INS	147632	53.55	50.85

No of Usable Ways	Dimensions mm			Ref No.	Order No. 0001	Price	
	H	D	W			Each	3+

Flexible Units

9	225	302	111	SVCUFSL9/INS	147593	42.25	42.75
12	225	355	111	SVCUFSL12/INS	147629	49.95	47.00



Insulated Consumer Units with Main Switch Incomer

No of Ways	Main incomer (A)	Dimensions mm			Ref No.	Order No. 0001	Price	
		H	D	W			Each	3+
2	63	225	141	111	SVCU2/INS	147535	15.70	14.95
5	100	225	194	111	SVCU5/INS	147548	19.15	18.15
8	100	225	248	111	SVCU8/INS	147551	20.95	19.85
11	100	225	302	111	SVCU11/INS	147564	24.20	22.20
14	100	225	355	111	SVCU14/INS	147577	28.75	27.75



Sector Consumer Units - Including New 17th Edition



SECTOR

Insulated Consumer Units - High Integrity

No of Ways Unprotected by RCD	No of Ways protected by RCD	Dimensions mm			Ref No.	Order No. 0001	Price		
		H	D	W			Each	3+	
2	4	4	225	355	111	SVCU244HI/INS	147645	85.00	79.55
4	3	3	225	355	111	SVCU433HI/INS	147658	85.00	79.55
4	6	5	225	445	111	SVCU465HI/INS	147661	90.00	84.45



SECTOR

Insulated Consumer Units - Dual RCCB

No of Ways protected by RCD	Dimensions mm			Ref No.	Order No. 0001	Price		
	H	D	W			Each	3+	
4	3	225	302	111	SVCU43DR/INS	147674	80.00	75.00
5	5	225	355	111	SVCU55DR/INS	147687	85.00	79.55
6	5	225	445	111	SVCU87DR/INS	147690	90.00	84.45



SECTOR

Insulated Consumer Units - RCCB Incomer

No of Ways	RCD Rating	Dimensions mm			Ref No.	Order No. 0001	Price	
		H	D	W			Each	3+
2	63A 30mA	225	141	111	SVCU2A/INS	147700	28.55	26.95
5	80A 30mA	225	194	111	SVCU5A/INS	147713	35.15	33.00



SECTOR

Consumer Units Kits Insulated

Description	Ref No.	Order No. 0001	Price	
			Each	3+
Garage Unit 63A 6A + 16A	SVGARAGE/INS	148013	38.25	36.25
Shower Unit 63A 50A + Blank	SVSHOWER/INS	148026	36.95	34.85

Sector Insulated Consumer Units

Features:

- Manufactured to BSEN60439-3
- Robust 1.2mm sheet steel construction
- IP2X rating
- Pre-assembled ready to accept MCBs.
- Rated voltage 240V AC 50/60Hz.
- 100A Busbar
- Complete with Earth and Neutral bars.
- Raised DIN rail providing top and bottom wiring routes
- All round cable entry- top, bottom, sides and rear
- Labels for circuit identification.
- Modular devices can be fitted.
- Translucent visor for discreet appearance.



NEW
17th EDITION
BOARDS

SECTOR

Metal Clad Distribution Board - Dual RCCB

Main incomer 100A DP for all circuits and 2 x 30mA DP RCD for selected circuits.

No of Ways	Dimensions mm	H	D	W	Ref No.	Order No. 0001	Price	
							Each	3+
4	3	238	292	123	SVCU43DR/MTL	147771	101.00	94.70
5	5	238	345	123	SVCU55DR/MTL	147784	110.00	103.00
8	7	238	438	123	SVCU87DR/MTL	147797	115.00	108.00



SECTOR

Metal Clad Distribution Boards Main Switch Incomer

No of Ways	Main incomer (A)	Dimensions mm			Ref No.	Order No. 0001	Price	
		H	D	W			Each	3+
2	63	210	126	96	SVCU2/MTL	147726	25.45	24.00
5	100	238	188	123	SVCU5/MTL	147739	29.40	27.85
8	100	238	241	123	SVCU8/MTL	147742	33.95	32.25
11	100	238	292	123	SVCU11/MTL	147755	36.70	34.75
14	100	238	345	123	SVCU14/MTL	147768	39.75	37.70



SECTOR

Metal Clad Distribution Board - RCCB Incomer

Main incomer 63A DP or 80A 30mA DP RCD

No of Ways	RCD Rating	Dimensions mm			Ref No.	Order No. 0001	Price	
		H	D	W			Each	3+
2	63A 30mA	210	126	96	SVCU2A/MTL	147807	45.10	42.55
5	80A 30mA	238	188	123	SVCU5A/MTL	147810	52.45	49.55

Sector Enclosures & Consumer Units Accessories



SECTOR

General Purpose Enclosures

Description	Ref No.	Order No. 0001	Price	
			Each	3+
2 Module Din Enclosure Insulated	SVE2/INS	148068	2.35	2.15
4 Module Din Enclosure Insulated	SVE4/INS	148071	4.00	3.65
4 Module Din Enclosure Metal	SVFOR4/INS	148084	13.95	13.25



SECTOR

RCBO (MCB / RCCB, 1 Mod)

Complies with BSEN61009.

Type C, 6kA Breaking Capacity

Rating (A)	Ref No.	Order No. 0001	Price	
			Each	5+
6	SVRCBO6/C	147894	38.80	35.25
10	SVRCBO10/C	147904	38.80	35.25
16	SVRCBO16/C	147917	38.80	35.25
20	SVRCBO20/C	147920	38.80	35.25
32	SVRCBO32/C	147933	38.80	35.25
40	SVRCBO40/C	147946	38.80	35.25
50	SVRCBO50/C	147959	38.80	35.25



SECTOR

Single Pole Miniature Circuit Breakers

Type B, 6kA breaking capacity.

Complies with BSEN60898.

Current limiting operation under fault conditions.

Rating (A)	Ref No.	Order No. 0001	Price	
			Each	5+
6	SVMCB6/B	147823	3.25	2.75
10	SVMCB10/B	147836	3.25	2.75
16	SVMCB16/B	147849	3.25	2.75
20	SVMCB20/B	147852	3.25	2.75
32	SVMCB32/B	147865	3.25	2.75
40	SVMCB40/B	147878	3.25	2.75
50	SVMCB50/B	147881	3.25	2.75





SECTOR

RCCB - DP (RCCB or RCD)

Complies with BSEN61008

Rating (A)	Ref No.	Order No. 0001	Price	
			Each	5+
25A 30mA	SVRCCB25/DP	147975	22.50	21.00
40A 30mA	SVRCCB40/DP	147988	23.75	21.95
63A 30mA	SVRCCB63/DP	147991	24.00	22.45
80A 30mA	SVRCCB80/DP	148000	26.95	25.00



SECTOR

Bell Transformer

Description	Ref No.	Order No. 0001	Price	
			Each	3+
12V Bell Transformer	SVBTR5	148042	16.55	15.75



SECTOR

Digital Timelock


Description	Ref No.	Order No. 0001	Price	
			Each	3+
1 Channel 24hr 7 Day	SV7TC	148055	62.95	58.95



SECTOR

Main Switch

Description	Ref No.	Order No. 0001	Price	
			Each	3+
100A Double Pole	SVMS100	148039	9.75	9.25

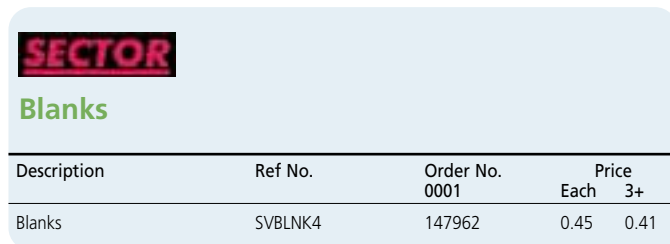

SECTOR

Blanks

Description	Ref No.	Order No. 0001	Price	
			Each	3+
Blanks	SVBLNK4	147962	0.45	0.41

Crabtree Consumer Units - Including New 17th Edition



Crabtree

STARBREAKER Insulated Consumer Units with Main Switch Incomer

Main incomer 100A DP (40A for 2 way board).

No of Ways	Main Incomer (A)	Dimensions mm			Ref No.	Order No. 2825
		H	W	D		
2	40	160	117	102	402/2B	988020
4	100	230	190	120	404/2B	988046
7	100	230	243	120	407/2B	988059
10	100	230	294	120	410/2B	988062
13	100	230	344	120	413/2B	027088
18	100	230	439	120	418/2B	988088



Crabtree

STARBREAKER Insulated Consumer Units Split Load

Main incomer 100A DP for all circuits plus 80A RCD 30mA DP.

No of Unprotected Ways	No of Protected Ways by RCD	Dimensions mm			Ref No.	Order No. 2825
		H	W	D		
3	4	230	294	120	407/2383B	041161
5	5 (63A)	230	344	120	410/2563B	027101
5	5	230	344	120	410/2583B	027114
8	7	230	439	120	415/2883B	041323



Crabtree

STARBREAKER Insulated Consumer Units High Integrity Dual RCD 13 Way

Main incomer 100A DP

2 x 63A RCDs 30mA DP

Switch Ways	RCD	RCD	Dimensions mm			Ref No.	Order No. 2825
			H	W	D		
2	6	5	230	439	120	413/226665B	060168
3	5	5	230	439	120	413/236565B	060197
4	5	4	230	439	120	413/246564B	060223
5	4	4	230	439	120	413/256464B	060249
6	4	3	230	439	120	413/266463B	060265



Crabtree

STARBREAKER Insulated Consumer Units Dual RCD Split Load 13 Way

Main incomer 100A DP

2 x 63A RCDs 30mA DP

Switch Ways	RCD	RCD	Dimensions mm			Ref No.	Order No. 2825
			H	W	D		
-	7	6	230	439	120	413/2637636B	060100
-	8	5	230	439	120	413/2638635B	060113
-	9	4	230	439	120	413/2639634B	060126

**Other Consumer Unit Options
Available On Request**



Crabtree

STARBREAKER Insulated Consumer Units with RCD Main Incomer

Main incomer 100A, 30mA DP.

(63A, 30mA for 2 way unit & 80A, 30mA for 4 way unit).

Other RCD options available - Please ask for details.

No of Ways	Main RCD Incomer (A)	Dimensions mm			Ref No.	Order No. 2825
		H	W	D		
2	63, 30mA	160	117	102	402/363B	988101
4	80, 30mA	230	190	120	404/383B	988127
7	100, 30mA	230	243	120	407/313B	041129
10	100, 30mA	230	294	120	410/313B	988156



Crabtree

RCBO Single Pole

For use in all Starbreaker consumer units.

Single module 6kA, Type B & C, 30mA.

Rating (A)	Ref No.	Order No. 2825	Rating (A)	Ref No.	Order No. 2825
B Curve			C Curve		
6	61/B10630	060383	6	61/C10630	991431
10	61/B11030	060398	10	61/C11030	991444
16	61/B11630	060401	16	61/C11630	991457
20	61/B12030	060414	20	61/C12030	991460
32	61/B13230	060427	32	61/C13230	991473
40	61/B14030	060430	40	61/C14030	991486



Crabtree

Single Pole Miniature Circuit Breakers

Type B & C, 6kA breaking capacity

Rating (A)	Ref No.	Order No. 2825	Rating (A)	Ref No.	Order No. 2825
B Curve			C Curve		
6	61/B06	572070	6	61/C06	573147
10	61/B10	572083	10	61/C10	574159
16	61/B16	572096	16	61/C16	574162
20	61/B20	572106	20	61/C20	574175
32	61/B32	572119	32	61/C32	574188
40	61/B40	572122	40	61/C40	574191
50	61/B50	991415	50	61/C50	
Blank Plate	443	988622			
4 ways					



Crabtree

Residual Current Devices (RCD) DP

For use in Starbreaker consumer units, 30mA.

Rating (A)	mA	Ref No.	Order No. 2825
40	30	340/030	572339
63	30	363/030	991402
80	30	380/030	572371
100	30	310/030	575145

Main Switch DP

For use in Starbreaker consumer units.

Rating (A)	Ref No.	Order No. 2825
40	40/M12	991389
63	63/M12	991329
100	100/M12	572986
100 (For high integrity and dual RCD units)	100/2MT	574227

Other Consumer Unit Options Available On Request

Hager Consumer Units - Including New 17th Edition



Insulated Consumer Units with Main Incomer

Main incomer 63A or 100A DP.

No of ways	Main Incomer (A)	Size	Ref No.	Order No. 4484
1	63	1	VC201	034698
2	63	1	VC202	034708
3	63	2	VC203	034711
4	63	3	VC204	034724
6	63	3	VC206	034737
4	100	3	VC104	034559
6	100	3	VC106	034562
8	100	4	VC108	034575
10	100	4	VC110	034588
12	100	5	VC112	034591
14	100	5	VC114	034627
16	100	6	VC116	034656
20	100	6	VC120	034685



Insulated Consumer Units with RCD Main Incomer

Main incomer 40A, 63A or 100A, 30mA DP.

No of ways	Main Incomer (A)	Size	Ref No. Plain	Order No. 4484
1	40	1	VC401H	034818
2	40	1	VC402H	034821
3	63	2	VC403H	034834
4	63	3	VC404H	034847
6	63	3	VC406H	034850
8	63	4	VC408H	034863
4	100	3	VC304H	034740
6	100	3	VC306H	034753
8	100	4	VC308H	034766

For glazed versions add 'G' on the end of the ref no.

CONSUMER UNIT DIMENSIONS			
Size	Dimensions (mm)		
	H	W	D
1	180	110	94
2	180	110	94
3	245	240	105
3	245	240	105
4	245	310	105
5	245	380	105
6	245	490	105



Insulated Split Load Consumer Units 30mA RCCB & RCBO Combinations

No of ways	Description	Size	Ref No.	Order No. 4484
Split Load with Single RCCB DP				
6	3+3 100A SW, 1 x 63A RCCB	4	VC733H	035244
8	Config. 100A SW, 1 x 63A RCCB	5	VC708C	035053
10	5+5 100A SW, 1 x 63A RCCB	5	VC755H	035257
12	6+6 100A SW, 1 x 63A RCCB	5	VC766H	035273
12	Config. 100A SW, 1 x 63A RCCB	5	VC712C	035082
18	Config. 100A SW, 1 x 63A RCCB	6	VC718C	035228
10	5+5 100A SW, 1 x 80A RCCB	5	VC655H	035008
12	6+6 100A SW, 1 x 80A RCCB	5	VC666H	035037
12	Config. 100A SW, 1 x 80A RCCB	5	VC612C	034986
18	Config. 100A SW, 1 x 80A RCCB	6	VC618C	035024
10	5+5 100A SW, 1 x 100A RCCB	5	VC555H	034960
12	Config. 100A SW, 1 x 100A RCCB	6	VC512C	034889
18	Config. 100A SW, 1 x 100A RCCB	6	VC518C	034944

Split Load with Twin RCCB DP plus Dedicated RCBO				
10	5+4+1 100A SW, 2 x 63A RCCB, 1 x 6A RCBO	5	VC754R	041539
14	7+6+1 100A SW, 2 x 63A RCCB, 1 x 6A RCBO	5	VC776R	041610
10	5+4+1 100A SW, 2 x 80A RCCB, 1 x 6A RCBO	5	VC854R	041610
14	7+6+1 100A SW, 2 x 80A RCCB, 1 x 6A RCBO	6	VC876R	041759

Split Load with 3 x RCCB DP				
12	5+5+2 100A SW, 2 x 80A RCCB, 1 x 40A RCCB	6	VC8552	041694

Split Load with Twin RCCB DP				
10	5+5 100A SW, 2 x 63A RCCB	5	VC755H1	041555
12	6+6 100A SW, 2 x 63A RCCB	6	VC766H1	041597
12	Config. 100A SW, 2 x 63A RCCB	6	VC712C1	041474
14	Config. 100A SW, 2 x 63A RCCB	6	VC714C1	041490
10	5+5 100A SW, 2 x 80A RCCB	5	VC855H	041717
12	6+6 100A SW, 2 x 80A RCCB	5	VC866H	035341

Split Load with Twin RCCB DP plus Unprotected Ways (for MCBs or RCBOs)				
10	3+4+3 100A SW, 2 x 63A RCCB, 3 x Unprotected Ways	5	VC7343U	041513
14	5+6+3 100A SW, 2 x 63A RCCB, 3 x Unprotected Ways	6	VC7563U	041571
10	5+4+1 100A SW, 2 x 80A RCCB, 1 x Unprotected Way	5	VC854U	041678
14	7+6+1 100A SW, 2 x 80A RCCB, 1 x Unprotected Way	6	VC876U	041775
10	3+4+3 100A SW, 2 x 80A RCCB, 3 x Unprotected Ways	5	VC8343U	041636
14	5+6+3 100A SW, 2 x 80A RCCB, 3 x Unprotected Ways	6	VC8563U	041733





hager

Mini Gamma Insulated Enclosures - IP30

Complete with Din Rail & Earth Terminal (Except 2 way unit).
Plain & transparent door available on request.

No of Ways	Dimensions mm			Ref No.	Order No. 4484
	H	W	D		
2	55	160	82	GD102E	002277
4	110	180	82	GD104E	002280
6	182	180	82	GD106E	002293
8	218	180	82	GD108E	002303



hager

RCBOs Single Pole

Short circuit 6kA, Type B, 30mA (Type C available on request).

Rating (A)	mA	Ref No.	Order No. 4484
6A	30	ADN106	041256
10A	30	ADN110	042169
16A	30	ADN116	042172
20A	30	ADN120	042185
32A	30	ADN132	042198
40A	30	ADN140	042208



hager

Single Pole Miniature Circuit Breakers

Type B, 6kA breaking capacity.

Rating (A)	Ref No.	Order No. 4484
6	MTN106	003742
10	MTN110	003755
16	MTN116	003768
20	MTN120	003771
32	MTN132	003917
40	MTN140	003962
50	MTN150	003975
63	MTN163	003988



hager

Residual Current Devices (RCD) Double Pole

Rating (A)	mA	Ref No.	Order No. 4484
25	30	CDC225U	003098
40	30	CDC240U	003124
63	30	CDC263U	003153
80	30	CD280U	024734
100	30	CD284U	024747

hager

Consumer Unit Accessories

Description	Ref No.	Order No. 4484
Single Module Blank - Shrouds Busbar & Blank Spare	VG01B	022927
Single Module Blank - Blanks DIN Rail Ways Only	VG01C	028196

MK Consumer Units - Including New 17th Edition



SENTRY Insulated & Metal Split Load Consumer Units

Pre fitted with 100A switch disconnecter DP and 80A 30mA RCD or 63A 30mA RCD DP.

Flexible design allowing RCD to be positioned to suit the required configuration of protected/non-protected circuits.

All necessary split-load cabling included.

No of modules	RCD Rating	Dimensions mm			Ref No.	Order No. 5779
		W	H	D		

Insulated Version

8	63A, 30mA	306	230	110	K5682s	003566
12	63A, 30mA	378	230	110	K5666s	003553
8	80A, 30mA	306	230	110	K5662s	003540
12	80A, 30mA	378	230	110	K5686s	003579
17	80A, 30mA	468	230	110	K5681s	003605

Metal Version

8	63A, 30mA	306	230	110	K5582s	003472
12	63A, 30mA	378	230	110	K5566s	003618
12	80A, 30mA	378	230	110	K5586s	003485
17	80A, 30mA	468	230	110	K5581s	003621



Consumer Unit Accessories

Description	Ref No.	Order No. 5779
-------------	---------	----------------

MCB Blank Plate Cover Mount	K5545S	000006
11 Way Busbar	K5511S	003414



SENTRY Insulated & Metal Consumer Units with Main Incomer

Order main incomer switch separately - Takes 2 module spaces.

No of Modules	INSULATED			METAL			
	Dimensions mm			Ref No.	Order No. 5779	Ref No.	Order No. 5779
	W	H	D				
4	140	230	110	K5604s	003508	K5504s	003401
8	234	230	110	K5608s	003634	K5508s	003650
12	306	230	110	K5612s	003511	K5512s	003427
16	378	230	110	K5616s	003524	K5516s	003430
21	468	230	110	K5621s	003647	K5520s	003663

Incomers

Description	Ref No.	Order No. 5779
63A Main Incomer DP (Use on 4 Module Board Only)	5560s	001885
100A Main Incomer DP	5500s	001775

See RCD section page 228 for RCD Incomer option.



SENTRY Insulated & Metal Flexible Consumer Units

Description	Total Ways	Unprotected	RCD1	RCD2	RCD3	INSULATED			METAL			
						Dimensions mm			Ref No.	Order No. 5779	Ref No.	Order No. 5779
						W	H	D				
10 Way, 100A Switch 2 x 63A, 30mA RCD	10	2	5	5	N/A	378	230	110	K5666s MAG 17ED	000158	K5566s MAG 17ED	000226
10 Way, 100A Switch 80A & 63A, 30mA RCD	10	2	5	5	N/A	378	230	110	K5686s MAG 17ED	000161	K5586s MAG 17ED	000239
15 Way, 100A Switch 80A & 63A, 30mA RCD	15	Up To 9	Up To 11	Up To 8	N/A	468	230	110	K5681s MAG 17ED	000174	K5581s MAG 17ED	000242
15 Way, 100A Switch 2 x 63A, 30mA RCD	15	Up To 9	Up To 11	Up To 8	N/A	468	230	110	K5683s MAG 17ED	000187	K5583s MAG 17ED	000255
13 Way, 100A Switch 2 x 63A & 40A, 30mA RCD	13	2	5	5	3	468	230	110	K5684s MAG 17ED	000190	K5584s MAG 17ED	000268



Single Pole Miniature Circuit Breakers

Type B, 6kA breaking capacity.

Rating (A)	Ref No.	Order No. 5779
3	5903s	002334
6	5906s	002347
10	5910s	002350
16	5916s	002363
20	5920s	002376
32	5932s	002389
40	5940s	002392
45	5945s	002402
50	5950s	002415



RCBO Single Pole

Short circuit 6kA, Type B, 30mA.

Rating (A)	mA	Ref No.	Order No. 5779
6A	30	6932s	003223
10A	30	6933s	003236
16A	30	6934s	003249
20A	30	6935s	003252
32A	30	6936s	003265
40A	30	6937s	003278
45A	30	6938s	003281
50A	30	6939s	000080



Residual Current Devices (RCD) Double Pole

Rating (A)	mA	Ref No.	Order No. 5779
40	30	5740s	002211
63	30	5760s	002237
80	30	5780s	002240
100	30	7700s	002790
63	100	6160s	002431
80	100	6180s	002444
100	100	6600s	002664



Bell Transformer

Primary voltage 230/240V AC 50/60Hz.

The transformer provides extra safe low voltage.

Rating	Ref No.	Order No. 5779
1A at 8V Primary	5711s	002198

Wylex Consumer Units - Including New 17th Edition



NH Insulated Consumer Units with Main Switch Incomer

Main incomer 100A DP (40A or 63A for 2 way board).

No of Ways	Main Incomer (A)	Dimensions mm			Ref No.	Order No. 7725
		H	W	D		
2	40	160	117	102	NH204/40	025169
2	63	160	117	102	NH204/63	025172
5	100	230	187	120	NH504	025428
8	100	230	240	120	NH804	025431
11	100	230	290	120	NH1104	025444
14	100	230	340	120	NH1404	025457
19	100	230	435	120	NH1904	025460



NH Insulated Consumer Units - FLEXIBLE Split Load Consumer Units

Main incomer 100A DP and 80A, 30mA RCD DP

Modular devices e.g. timers, bell transformer can be fitted alongside MCBs.

No of Ways Unprotected by RCD	No of Ways Protected by RCD	Dimensions mm			Ref No.	Order No. 7725
		H	W	D		
2 to 4	2 to 4	230	240	120	NHRS6SL	002917
3 to 6	3 to 6	230	290	120	NHRS9SL	027730
3 to 9	3 to 9	230	340	120	NHRS12SL	027727
5 to 12	5 to 12	230	435	120	NHRS17SL	000032



NH Insulated Consumer Units High Integrity Dual RCD Consumer Unit

Main incomer 100A DP, 2 x 80A 30mA RCDs DP

Total Ways	MS Ways	RCD Ways	RCD Ways	Dimensions mm			Ref No.	Order No. 7725
				H	W	D		
10	Flexible	Flexible	Flexible	230	340	120	NHRS10SSLHI	004083
15	Flexible	Flexible	Flexible	230	435	120	NHRS15SSLHI	004096
10	2	4	4	230	340	120	NHRS44204	003895
15	2	6	7	230	435	120	NHRS76204	003929
15	3	6	6	230	435	120	NHRS66304	003932
10	4	3	3	230	340	120	NHRS33404	003916
15	5	5	5	230	435	120	NHRS55504	003958



NH Insulated Consumer Units Dual RCD Insulated Split Load Consumer Unit

Main incomer 100A DP, 2 x 80A 30mA RCDs DP

Total Ways	RCD Ways	RCD Ways	Dimensions mm			Ref No.	Order No. 7725
			H	W	D		
10	Flexible	Flexible	230	340	120	NHRS10SL	004106
15	Flexible	Flexible	230	435	120	NHRS15SL	004119
10	5	5	230	340	120	NHRS5504	026252
15	8	7	230	435	120	NHRS8704	026265



NH Insulated Consumer Units with RCD Main Incomer

Main incomer 100A, 30mA DP
(except 2 way units 40A and 63A 30mA).

No of Ways	Main RCD Incomer (A)	Dimensions mm			Ref No.	Order No. 7725
		H	W	D		
2	40, 30mA	160	102	117	NHRS204/40	025185
2	63, 30mA	160	102	117	NHRS204/63	025198
5	100, 30mA	230	187	120	NHRS504	025305
8	100, 30mA	230	240	120	NHRS804	025318
11	100, 30mA	230	290	120	NHRS1104	025321



NSB Single Pole Miniature Circuit Breakers

For use in NH Consumer Units.

Type B, 6kA breaking capacity.

Rating (A)	Ref No.	Order No. 7725
6	NSB06	016013
10	NSB10	016026
16	NSB16	016039
20	NSB20	016042
32	NSB32	016055
40	NSB40	016068
50	NSB50	027701
Blanking Plate (Push Fit For Cover)	NH00	026537
Busbar & Cover Blank Plate	NHB1PP	003000



LIFELINE Residual Current Devices (RCD) DP

Rating (A)	mA	Ref No.	Order No. 7725
40	30	WRS40/2	023307
63	30	WRS63/2	023310
80	30	WRS80/2	023323
100	30	WRS100/2	023336



NSBS RCBO

Type B and C, 6kA, 30mA.

Rating (A)	TYPE B		TYPE C	
	Ref No.	Order No. 7725	Ref No.	Order No. 7725
Single Pole				
6A	NSBS6-B/1	03819	NSBS6/1	027552
10A	NSBS10-B/1	03806	NSBS10/1	027565
16A	NSBS16-B/1	03479	NSBS16/1	027578
20A	NSBS20-B/1	03482	NSBS20/1	027581
32A	NSBS32-B/1	03495	NSBS32/1	027594
40A	NSBS40-B/1	03505	NSBS40/1	027604

Double Pole

6A	NSBS6/2	017643
10A	NSBS10/2	017656
16A	NSBS16/2	017669
20A	NSBS20/2	017672
32A	NSBS32/2	017685
40A	NSBS40/2	023242



Bell Transformer

Primary 230v AC, secondary 12V AC 8vA.

Description	Ref No.	Order No. 7725
Bell Transformer	MTS8	017397

Wylex Consumer Unit Accessories



Insulated STANDARD 1 way Switch Fuse and Consumer Units with Main Incomer

1 way switch fuse or multi way consumer units.

Accepts fuses or MCBs.

No of Ways	Main Incomer (A)	Dimensions mm			Ref No.	Order No. 7725
		H	W	D		
1 way	45	121	98	68	104	000249
2 way	45	120	125	70	204	005419
3 way	60	155	190	95	304	000663
4 way	60	155	190	95	404	000825
6 way	100	186	272	103	604	001329
8 way	100	186	323	103	804	001811



Single Pole Miniature Circuit Breakers

For use in Standard Consumer Units

Type B, 3kA breaking capacity.

Rating (A)	Ref No.	Order No. 7725
6	B6	012622
10	B10	012635
16	B16	012648
20	B20	002153
32	B32	012651
40	B40	012664
Blank Plate	M10	002409



Metal STANDARD 1 Way Switch Fuse and Consumer Units with Main Incomer

1 way switch fuse or multi way consumer units.

Accepts fuses or MCBs.

No of Ways	Main Incomer (A)	Dimensions mm			Ref No.	Order No. 7725
		H	W	D		
1 way	45	131	112	80	106	004290
1 way	60	242	172	98	160CM*	000472
1 way	80	305	178	76	110M/80*	015616
1 way	100	305	178	76	110M	015603
2 way	45	131	140	93	206	004410
3 way	45	153	210	99	306	000702
4 way	60	154	210	99	406	000870
6 way	100	210	293	104	606	001374

* Supplied with cartridge fuse



Cartridge Fuse and Links

For use in Standard Consumer Units

Rating (A)	Colour Code	Cartridge Fuse		Fuse Link	
		Ref No.	Order No. 7725	Ref No.	Order No. 7725
5	White	C5	002195	CFL5	002292
15	Blue	C15	002218	CFL15	002302
20	Yellow	C20	002234	CFL20	002315
30	Red	C30	002250	CFL30	002328
45	Green	C45	002276	CFL45	002331
Blank Base		M10	002409		



SQUARE D

DOMAE Insulated Consumer Units with Main Incomer (or Split Load with Kit)

Main incomer Switch 63A or 100A DP (Order Separately)

Main incomer RCD 63A or 80A DP (Order Separately)

No. of Ways	Dimensions mm			Ref No.	Order No. 8060
	H	W	D		
2	240	189	127	DOM2CU	000534
4	240	224	127	DOM4CU	000547
6	240	260	127	DOM6CU	000550
8	240	296	127	DOM8CU	000563
12	240	368	127	DOM12CU	000576
16	240	440	127	DOM16CU	000589
63A Main Incomer SW DP				DOM63SW	000602
100A Main Incomer SW DP				DOM100SW	000592
63A Main Incomer RCD DP				DOM63R30	000628
80A Main Incomer RCD DP				DOM80R30	000615
Split Load Kit Includes 63A RCCB, 30mA & Cables				DOM63R30KIT2	003308
Split Load Kit Includes 80A RCCB, 30mA & Cables				DOM80R30KIT2	003324



SQUARE D

DOMAE Insulated Consumer Units Configurable Dual RCD & High Integrity Boards

No. of Ways	Description	Dimensions mm			Ref No.	Order No. 8060
		H	W	D		
6+6	Main Incomer 100A 2 x 63A RCDs, 30mA Configurable Board	240	440	127	DOMR6R6CU	004174
6+6	Main Incomer 100A 2 x 80A RCDs, 30mA Configurable Board	240	440	127	DOMR6R6DCU	004187
2+5+5	100A Main Switch 2 x 80A RCDs, 30mA	240	440	127	DOMS2R5R5DCU	004226



SQUARE D

DOMAE Insulated Shower and Garage Units 2 Way

Description	Dimensions mm			Ref No.	Order No. 8060
	H	W	D		
Shower Unit with 63A, 30mA RCCB & 40A MCB	240	189	127	SHOWER6340D	003379
Shower Unit with 63A, 30mA RCCB & 45A MCB	240	224	127	SHOWER6345D	003382
Garage IP55 Enclosure with 63A, 30mA RCCB plus One 6A & 16A MCB	240	260	127	GARAGE63D	003353



SQUARE D

DOMAE Single Pole Miniature Circuit Breaker

Type B, 6kA breaking capacity.

Rating (A)	Ref No.	Order No. 8060
3A	DOM03B6	000657
6A	DOM06B6	000660
10A	DOM10B6	000673
16A	DOM16B6	000686
20A	DOM20B6	000699
32A	DOM32B6	000709
40A	DOM40B6	000712
45A	DOM45B6	000725
50A	DOM50B6	000738

DOMAE Single Module RCBO

Type B, 6kA, 30mA.

Rating (A)	Ref No.	Order No. 8060
6A	DOM06B6R30	004103
10A	DOM10B6R30	004116
16A	DOM16B6R30	004129
20A	DOM20B6R30	004132
32A	DOM32B6R30	004154
40A	DOM40B6R30	004145
45A	DOM45B6R30	004158